

Installation Procedure LD-4582

I. Accessories List



① Shower head




② Gasket



③ Wall anchors




④ Screws



⑤ Mounting brackets



⑥ Stainless steel gaskets



⑦ Hose



⑧ Hand shower




⑨ Holder



⑩ Mesh gasket

II. Procedure

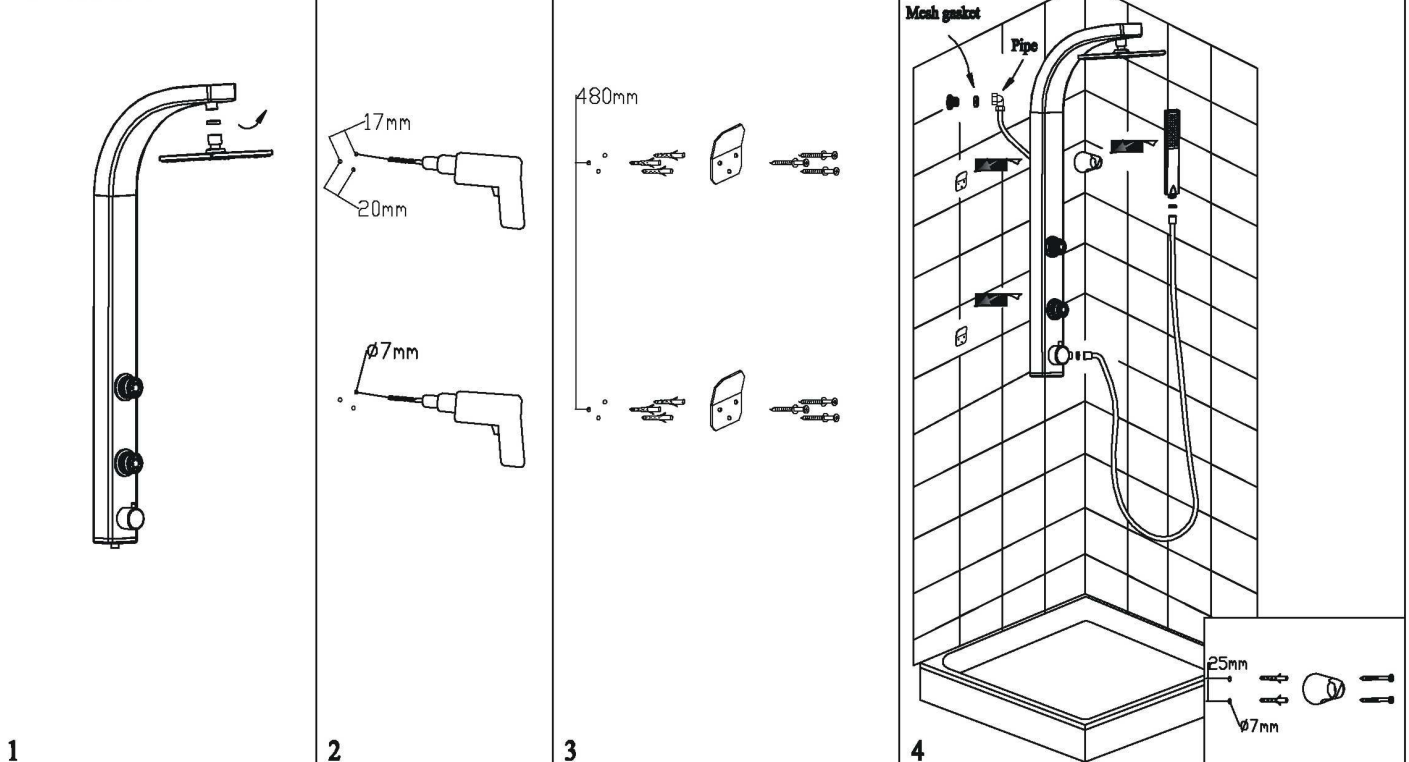

1. Connect Shower head① to the column placing Gasket②.
2. Drill 6 holes.
3. A. Insert Wall anchors③ inside the holes.
B. Use Screws④ to fix Mounting brackets⑤ onto the wall with Stainless steel gaskets⑥.
4. A. Hang up the column on the Mounting brackets⑤.
B. Place the hose gaskets into the hose nuts.
C. Connect Hose⑦ to Hand shower⑧, pipe to the upper water outlet, column to the Hose⑦.
D. Drill 2 hoses, and insert the Wall anchors③.
E. Fix Holder⑨ on the wall by Screws④.
F. Set the Hand shower onto the holder.

IV. Note

1. Do not forget to use the gaskets to prevent leakage on the connections.
2. If you find that water pressure or water volume is unusual, please clean the mesh gaskets regular.